

Luna SHP PF2 5/4x6




DECKING

Luna SHP Profix 2, 5/4x6 is a premium and chemical-free Thermowood decking.

PRODUCT DETAILS

Product name	Luna SHP PF2 5/4x6
Actual dimensions	1.02 x 5.5 in. (26x140 mm)
Class	LunaThermo-D
Surface	Planed
Species	Pine, <i>Pinus sylvestris</i>
Lengths	11 ft 9.7 in. – 16 ft 8.8 in. (3,6-5,1 m) (availability varies) Length package in 11.8 in. (30 cm) modules
Utility data	Coverage width 5.75 in, 2.09 ft/sq-ft (146 mm, 6,85 m/m ²) Weight average ~1.05 lbs/ft, ~2.19 lbs/sq-ft (~1,6 kg/m ~10,7 kg/m ²)
Packaging	Package size 140 pcs (half package) Package covered by Lunawood plastic hood on 5 sides
Article	26x140 SHP PF2 Thermo-D Rw A
Product specifications	Tolerances, quality and installation based on Lunawood general rules and instructions. Nominal size: 1.26 x 6 in. (32x150 mm)

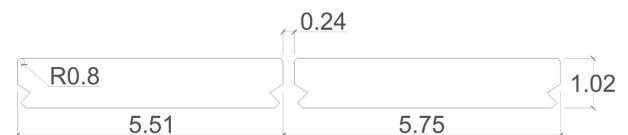

LUNAWOOD TECHNICAL DATASHEET

Essential Characteristics	Pine (<i>Pinus sylvestris</i>)	Harmonized European standard
Density	420 kg / m ³ 26.22 lbs/ft ³	SFS-EN 317
Reaction to fire class	Class B, FSI 75, SDI 200	ASTM E84
Screw traction resistance	19,45 ± 1,47 N/mm ² 2821.8 ± 213 psi	SFS-EN 13446
Thermal conductivity	0,09 W/(m·K)	EN ISO 13787 + EN 12667
Durability class	Class 2 Thermo-D	EN 350-1
Use class	Class 3 Thermo-D	EN 335
Stability, shrinking and swelling	Tangential fibre direction 4 % Radial fibre direction 2 %	SFS-EN 317
Equilibrium Moisture	6,4 %	EN 13183-1
Brinell Hardness	1,4 N/mm ² 203.05 psi*	SFS-EN 1534
Janka	1700 N 382 lbf*	ASTM D143-94
TVOC	173.34*	
CO2 emissions (EPD)	Thermo-D 0,077 mg/m ² h 117 kg CO ₂ eq/m ³ 7.30 lbs CO ₂ /ft ³	ISO 16000-9:2006 SFS-EN 16516:2017 Lunawood EPD

Use QR code by phone or click it to open to Your browser



Product documents



Design tools

Version: 1/2024